

Vehicle Crossover (Driveway) Application 2026/27

Purpose of Form: This form is to be used to process your request under Subordinate Local Law 1 (Administration 2019) Schedule 27 Carrying out works on a road or interfering with a road or its operation for the construction of a vehicle crossover.

Is this application for a driveway crossover required by a Development Permit for a **Material Change of Use, Reconfiguring a Lot, or Operational Works?**

YES Permit Number: There are no further application fees. Complete the application checklist below and deliver to a Council Customer Service Office or email to: development@frasercoast.qld.gov.au .

NO Then application fees **are** payable. Complete the application checklist below and deliver to a Council Customer Service office with the application fees or email to engineering.services@frasercoast.qld.gov.au see below for payment methods.

Vehicle Crossover \$500.00

Inspection Fee (per visit) \$338.00

APPLICATION CHECKLIST

Prior to submitting your application, please ensure the mandatory items listed below are supplied. If these items are **not** supplied your application will automatically be assessed as not meeting criteria and you will receive correspondence advising your application is 'not approved'.

- Completed applicant information including proposal of works and permission obtained from property owners **(all fields are mandatory)**
- Provided or sketched a detailed site plan for vehicle crossover location (Page 3) including clear distances and measurements from property boundary lines, relevant land markings, new vehicle crossover dimensions and show any existing crossovers **(mandatory)**
- I have read and understand the responsibilities of "Working in Council's Road Reserve".
- I have read and understand the "Vehicle Crossover Specifications" and "Standard Drawings".

PREFERRED RESPONSE METHOD: Mail Email

OFFICE USE ONLY		
Date:	Receipt no:	Amount Paid: \$
CSO:	DOCS Reference #:	
Application Checklist Completed Above: <input type="checkbox"/>	Detailed site plan attached including measurements: <input type="checkbox"/>	

Methods of Payment

In Person	By Phone	By Mail
At any Council Office Cash, cheque, EFTPOS or credit card is accepted at our Customer Service Centres between 8.15am - 4.30pm Monday – Friday	Contact a Customer Service Centre on 1300 79 49 29 for credit card payment on complete applications which have already been lodged between 8.15am - 4.30pm Monday – Friday	Post completed form with cheque/money order only to:- Chief Executive Officer Fraser Coast Regional Council PO Box 1943 HERVEY BAY QLD 4655


PROPERTY OWNER DETAILS			
Name			
Phone Number			
Email Address			
Owners Consent Obtained (if applicable) *	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> Not Applicable
	Method: Written/Verbal		
* Property owner's consent must be obtained if the applicant is not the owner.			

PROPERTY ADDRESS AND PROPOSED WORK		
Property Address		
Proposed Dates	Start Date:	End Date:
Proposed works	<input type="checkbox"/> New crossover <input type="checkbox"/> Second crossover <input type="checkbox"/> Altered crossover	
Indicate type of crossover required (refer to standard drawings for types)	<input type="checkbox"/> Residential kerbed	
	<input type="checkbox"/> Commercial/Industrial with kerb	
	<input type="checkbox"/> Rural with invert, pipe or box culvert	
	<input type="checkbox"/> Residential kerbed with swale profile	
Has the catchment area been assessed for adequate pipe/culvert size? (If applicable)	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Applicable (See attached standard drawing FC-230-03 item 6)	

PRINCIPAL CONTRACTOR DETAILS (If Applicable)	
Principal Contractor Business Name	
Name of Contact	
Phone Number	
Email Address	

Payment Information for Application	<input type="checkbox"/> Owner (see above)	<input type="checkbox"/> Contractor (see above)	<input type="checkbox"/> Other (details below)
Name			
Phone Number			
Email Address			
Preferred Payment Method*	<input type="checkbox"/> Credit Card – Customer Service will make contact for card details		
	<input type="checkbox"/> Cheque – Via Post or at a Council Office		
	<input type="checkbox"/> Cash – At a Council Office Only		
	<input type="checkbox"/> Not Applicable – Development Permit (see above)		
*Applications will only be processed upon receipt of full payment (if required).			

MANDATORY: Detailed site plan for the vehicle crossover location and dimensions including distances, measurements from property boundaries, service locations, and existing crossovers.



“Working in Council’s Road Reserve”

Application to Conduct Works in a Council Road Reserve

Prior to commencing work in the road reserve, Council may require submission of an Application for Approval to Conduct Works in Council Road Reserve, available on Council’s website. A minimum of 10 days is required for Council to assess and respond/approve an application.

Traffic and Pedestrian Management

A Traffic Management Plan (including pedestrian management) may be required for works carried out under this application if approved. If a traffic management plan is required, Council recommends engaging an accredited traffic management organisation to undertake this aspect of the works.

Work Health & Safety (WHS)

The WHS Regulations define construction work on, or adjacent to, a road, as **high-risk construction work**, and safety must be a primary aspect of undertaking works in the road reserve. Compliance with the Work Health and Safety Act 2001 (Qld) and appropriate Codes of Practice are mandatory requirements. As such a safe work method statement must be prepared for the works.

Indemnify Council Against Claims

If this application is approved, Council shall be indemnified by the principal contractor/applicant/owner against any claims whatsoever that may arise as a result of the works and reinstatement of the area including the associated signage arrangements and any associated road closure or alterations.

“Vehicle Crossover Specification”

General

All works associated with vehicle crossovers must be approved by Council prior to construction commencing, and works must be undertaken to a competent standard using accepted trade practices and quality workmanship. Public liability cover is required, and evidence submitted prior to commencement of works.

Vehicle crossover construction shall include all the associated works including traffic control, saw cutting the kerb and footpath, excavation, compaction, and removal of surplus material. This specification is to be read in conjunction with the standard drawings below.

Service alterations

All existing service covers/lids shall be incorporated flush with the vehicle crossover finished level. Should services require alteration notification shall be given to the appropriate service authority at least 14 days prior to construction. Any service alteration shall be at the property owner’s expense.

Vehicle crossover Locations

There are some locations where vehicle crossovers will not normally be permitted. These are outlined in section 3 AS/NZS 2890.1 Parking Facilities – Off Street Parking, and include but are not limited to:

- On the radius of an intersection and 6m beyond the tangent point
- Opposite a tee intersection
- Where sight distance is restricted
- On major roads where traffic turning right into vehicle crossover will restrict through traffic movement.

Standard Drawings

The dimensions of vehicle crossovers are shown on the following standard drawings:

1. FC-230-01 Residential Driveway Slab and Tracks
2. FC-230-02 Commercial Driveway Slab
3. FC-230-03 Rural Access Pipe/Box Culvert and Invert Crossovers
4. FC-230-04 Residential kerbed with swale profile

Property owners are advised that the drawings are based on the most commonly used vehicles however there will be some vehicles that require specific design considerations e.g., limousines, cars with caravans.

It is important to ensure that for kerbed streets the level after the first 1.5m of the vehicle crossover matches that of the kerb. This will reduce the risk of stormwater flowing back into properties that are beneath the road level. Also where the vehicle crossover traverses the footpath zone, the grade of the vehicle crossover shall be set at a maximum of 2.5%.

Construction of piped crossovers need to ensure that there is a dip in the access that is lower than the road so that if the table drain overflows, water is less likely to flow onto the traffic lanes.

Subgrade

The subgrade shall be formed at the required depth below the finished surface level. All soft, yielding or otherwise unsuitable material shall be replaced with sound material. The subgrade and bedding/base material shall then be compacted with mechanical compaction equipment. Just prior to pouring concrete, the subgrade should exhibit suitable moisture content.

Materials

Vehicle crossovers may be constructed using concrete, asphalt, pavers, or gravel road base.

Concrete: Only premix concrete shall be used, the minimum strength shall be grade N32 in accordance with AS 1379 and AS 3600. Formwork shall be used on all sides and securely fixed. The concrete shall be fully compacted. Expansion joints, 10mm in width for the full depth of paving, shall be constructed at the back of the vehicle crossover ramp 1.5m from and parallel to the kerb and where the crossover abuts against the footpath. Expansion joints shall consist of a preformed jointing material of bituminous fibreboard or equivalent. In unreinforced concrete construction joints shall be cut at 3m centres both perpendicular and parallel to the road and shall be cut as soon as the concrete has cured sufficient to walk on.

Asphalt: A minimum 200mm of road base shall be provided beneath the asphalt. The minimum depth of asphalt is 25mm for a residential crossover and 40mm for an industrial crossover. An increased depth of road base may be required beneath commercial crossovers (specific design required).

Pavers: Residential crossovers shall use pavers at least 50mm thick and commercial crossovers shall use pavers at least 60mm thick. Herringbone is the recommended laying pattern. All pavers shall be confined by standard edging blocks set in concrete flush with adjacent surfaces.


A minimum 150mm of road base shall be provided beneath the pavers. An increased depth of road base may be required beneath commercial crossovers (specific design required). Design and construction guidelines for clay pavers are provided by the Clay Brick and Pavers Institute www.claybrick.com.au.

Design and construction guidelines for concrete pavers are provided by the Concrete Masonry Association of Australia www.cmaa.com.au.


Gravel Road Base: A minimum 200mm of gravel road base shall be provided. An increased depth of road base may be required beneath commercial crossovers (specific design required).

Privacy Notice: In using this form, you are providing personal information such as name and contact details.


This information will be used only for the purpose stated above and will only be accessed by persons who have been authorised to do so. Your personal information is handled in accordance with the *Information Privacy Act 2009*.

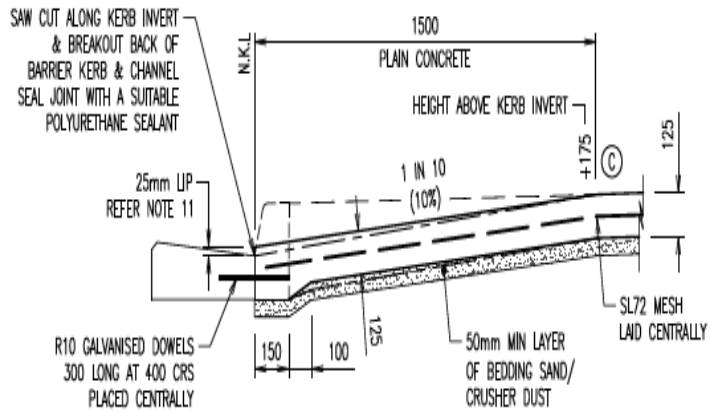


BARRIER KERB & CHANNEL - BREAKOUT

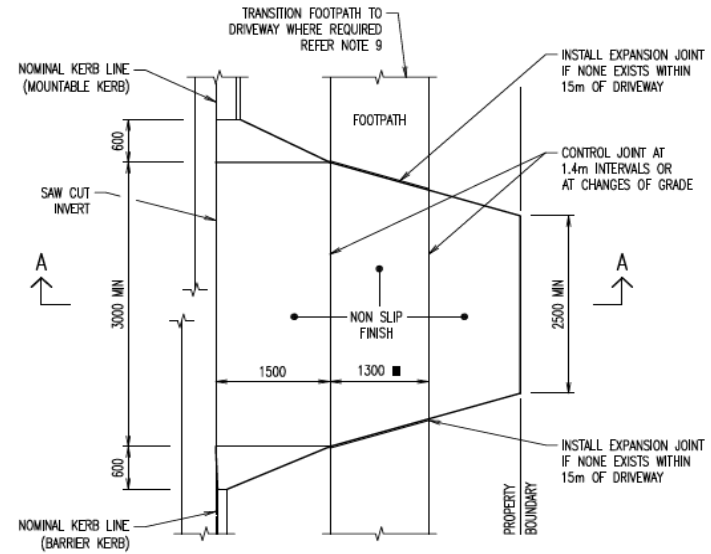

SLAB TYPE

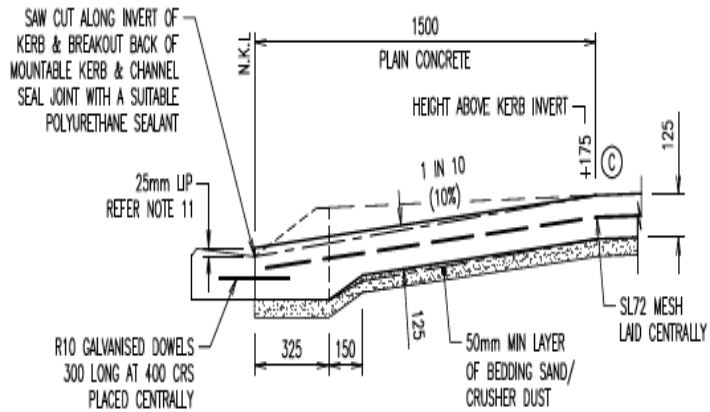

MOUNTABLE KERB & CHANNEL - BREAKOUT

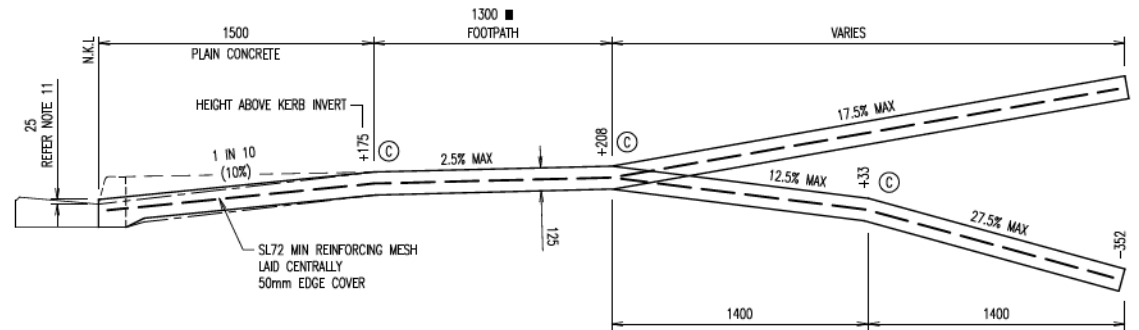

SECTION A-A

F			
E			
D			
C			
B	FOOTPATH WIDTH, NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE



RESIDENTIAL DRIVEWAY CROSSING SLAB AND TRACKS			
DESIGN OFFICE	CHECKED CWB *	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES Devendra Naidu*	DATE 08/16

STANDARD DRAWING			
SHEET 1 OF 1		STANDARD DRAWING No:	
A3	FC-230-01		

NOTES: RESIDENTIAL DRIVEWAY CROSSING SLAB AND TRACKS

1. This crossing is not designed for commercial vehicles. For commercial vehicle/industrial crossings refer FCRC STD FC-230-02
2. Driveway configuration and dimensions are consistent with the standard road cross falls of 3%. If road cross fall exceeds 3%, driveway profile may need to be redesigned to ensure satisfactory clearance for vehicles. Driveway profile may be varied to suit difficult or existing conditions with approval by Council.
3. Approved materials for construction: Concrete, paving blocks on minimum 150mm compacted road base or asphalt on minimum 200mm compacted road base, refer project drawings.
4. Concrete to be grade N32 in accordance with AS 1379 and AS 3600.
5. Reinforcing mesh to AS/NZS 4671, laid centrally with 50 mm edge cover.
6. Concrete to be broom finished for slip resistance to AS 4586.
7. Finishes other than broom finished concrete to be approved by Council, with regards to long term slip resistance and durability. The thickness of decorative surfacing is additional to the concrete thickness shown.
8. Adjoining concrete footpaths and verge may require re-profiling to match driveway. Verge earthworks must be well compacted, top dressed and turfed. Earthworks cut and fill batters to be a maximum grade of 1 in 6.
9. Where existing footpath to be transitioned to new driveway crossing, transition footpath at a maximum grad of 1 in 14.
10. Expansion joints to be full depth 10mm thick closed cell cross linked polyethylene foam (85-150kg/m³) or full depth 10mm thick compressed granulated corkboard. Seal surface of joint with a suitable polyurethane sealant.
11. 25mm lip at channel invert may be provided on both type 'A' and type 'B' kerb and channel types to prevent water flow ingress on flat or negative verge cross falls and steep longitudinal grades on kerb, where mobility access is required at driveway crossing, remove lip from driveway profile. Grade on driveway crossing not to exceed 1 in 8.
12. All appropriate permits must be obtained from Council, including approval of location and levels prior to excavation.
13. The maintenance of all accesses from the through road pavement to the property boundary is the responsibility of the property owner.
14. Maximum allowable grade change to be 15%.
15. Dimensions are in millimetres unless shown otherwise.

LEDGEND







- Footpath width, refer project drawings.
- N.K.L Nominal kerb line (kerb invert)
- © Control joint

F			
E			
D			
C			
B	FOOTPATH WIDTH, NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE



RESIDENTIAL DRIVEWAY CROSSING SLAB AND TRACKS			
DRAWN DESIGN OFFICE	CHECKED CWB *	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES Davender Naidu *	DATE 08/16
* SIGNED ORIGINAL HELD IN THE DESIGN OFFICE			

STANDARD DRAWING	
SHEET 1 OF 1	
STANDARD DRAWING No:	
A3	FC-230-01
A	B

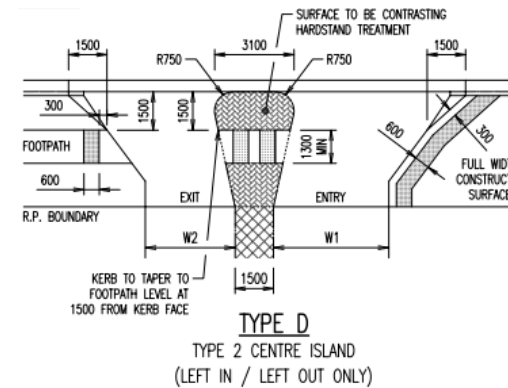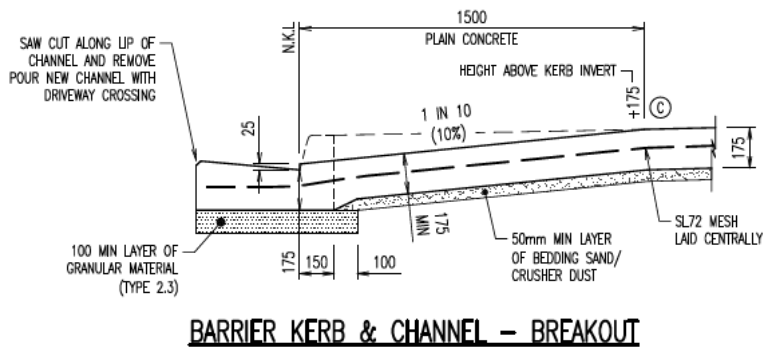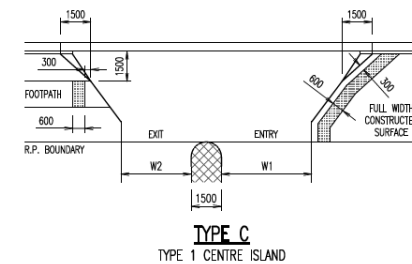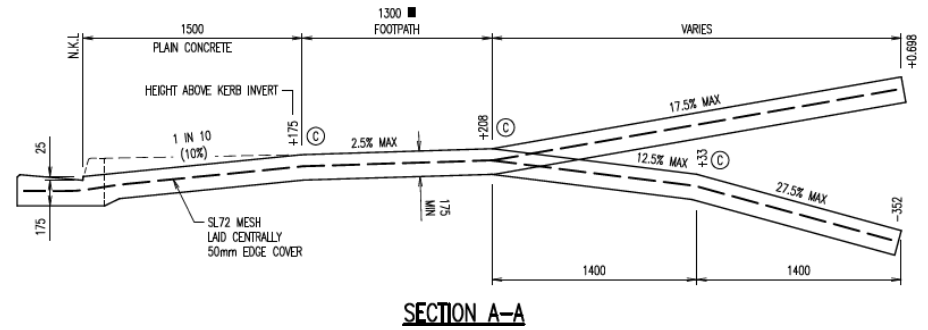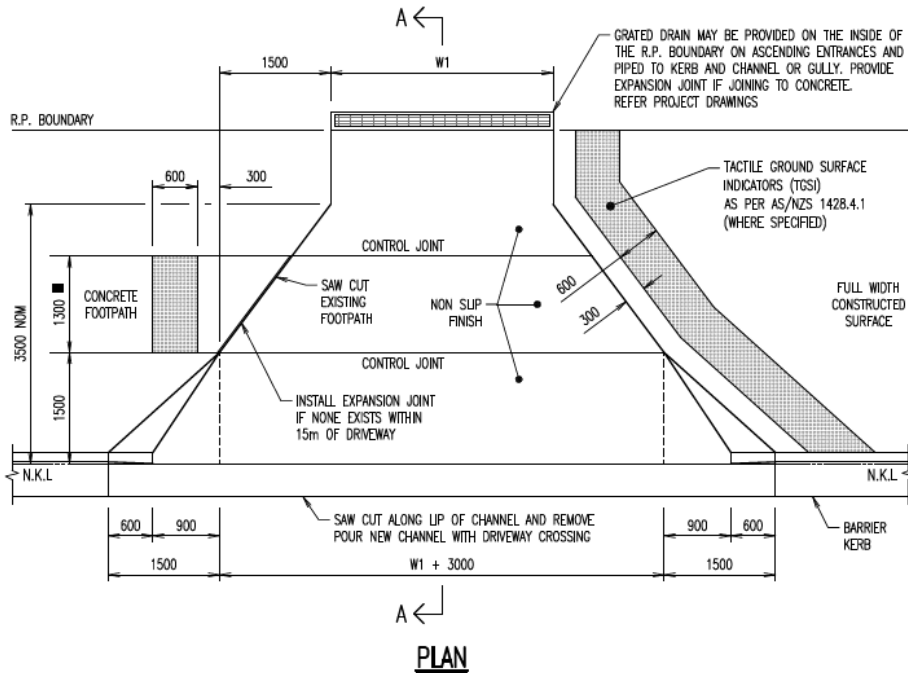

COMMERCIAL/INDUSTRIAL VEHICLE CROSSING DETAILS

TYPE	W1	W2
B	6.0 - 9.0	-
C1 / D1	4.5	3.5
C2 / D2	5.5	5.0
C3 / D3	7.5	6.0
C4 / D4	9.0	7.5

F			
E			
D			
C			
B	DRIVEWAY TYPES ADDED, FOOTPATH WIDTH, NOTES ALTERED & TITLEBLOCK CHANGE	08/16	
A	ORIGINAL ISSUE	01/11	
REV	DETAILS OF AMENDMENTS	APPROVED	DATE



COMMERCIAL/INDUSTRIAL DRIVEWAY CROSSING HEAVY DUTY SLAB			
DRAWN	DESIGN OFFICE	CWB*	DATE
CHECKED	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES	Davendra Naidu*	08/16
* SIGNED ORIGINAL HELD IN THE DESIGN OFFICE			

STANDARD DRAWING			
SHEET	1	OF	1
STANDARD DRAWING No.:			
A3	FC-230-02		
A	B		

NOTES: COMMERCIAL / INDUSTRIAL DRIVEWAY CROSSING HEAVY DUTY SLAB

1. Concrete to be grade N32/20 in accordance with AS 1379 and AS 3600.
2. Reinforcing mesh to AS/NZS 4671. Mesh to be laid centrally with 50mm edge cover, lap fabric 250mm.
3. Concrete to be broom finished for slip resistance to AS 4586.
4. Finishes other than broom finished concrete to be approved by Council. With regards, to long term slip resistance and durability. The thickness of decorative surfacing is additional to the concrete thickness specified.
5. Depths of concrete and reinforcing steel shown are the minimum requirements for good subgrade conditions and average traffic loading. Where this does not apply. Depths of concrete and reinforcing shall be increased to suit specific conditions.
6. Where the subgrade is less than CBR 5, excavate and provided imported granular material to satisfaction of council.
7. Dimension W1 & W2, refer project drawings.
8. All existing asphalt or concrete pavements to be saw cut prior to allow for neat removal and reinstatement.
9. Full cross section of kerb and channel to be removed and reinforcing mesh to extend to within 50mm of channel lip. Road pavement to be cement treated if disturbed during removal of kerb and channel and resurfaced with bitumen or asphalt to match road surface.
10. Adjoining concrete footpaths and verge may require re-profiling to match driveway, verge earthworks must be well compacted, top dressed and turfed. Earthworks cut and fill batters to be a maximum grade of 1 in 6.
11. Existing footpath profile to be maintained where possible. Variations to the design profiles shown are subject to approval by council.
12. Where directed by council tactile ground surface indicators (TGSIS) are to be provided adjacent to the driveway in accordance with AS/NZS 1428.4.1.
13. Expansion Joints to be full depth 10mm thick closed cell cross linked polyethylene foam (85-150kg/m³) or full depth 10mm thick compressed granulated corkboard. Seal surface of joint with a suitable polyurethane sealant.
14. All appropriate permits must be obtained from Council, including approval of location and levels prior to excavation.
15. The maintenance of all accesses from the through road pavement to the property boundary is the responsibility of the property owner.
16. Maximum allowable grade change to be 15%.
17. Dimensions are in millimetres unless shown otherwise.

LEDGEND

- Footpath width, refer project drawings.
- N.K.L Nominal kerb line (kerb invert)
- © Control joint

F			
E			
D			
C			
B	DRIVEWAY TYPES ADDED, FOOTPATH WIDTH, NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE




COMMERCIAL/INDUSTRIAL DRIVEWAY CROSSING HEAVY DUTY SLAB			
DRAWN	DESIGN OFFICE	CWB *	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES Davendra Naidu* * SIGNED ORIGINAL HELD IN THE DESIGN OFFICE
			DATE 08/16

STANDARD DRAWING	
SHEET	1 OF 1
STANDARD DRAWING No:	
A3	FC-230-02
A	B



TYPE 'A'

INVERT CROSSING

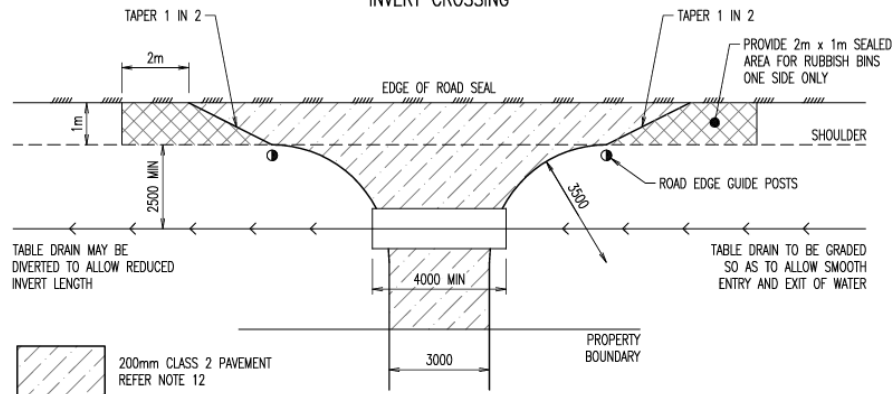


TYPE 'B'

PIPE OR BOX CULVERT CROSSING

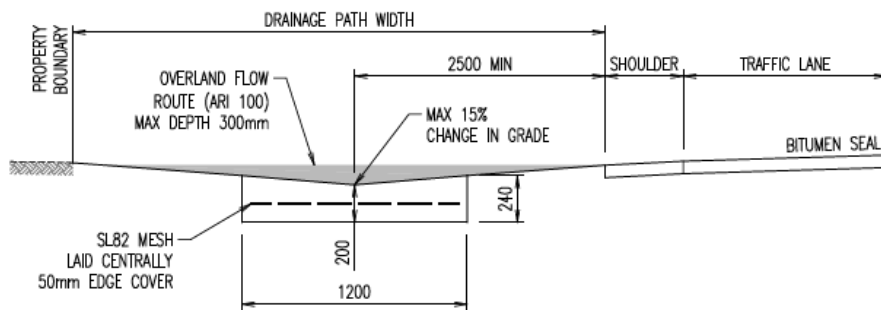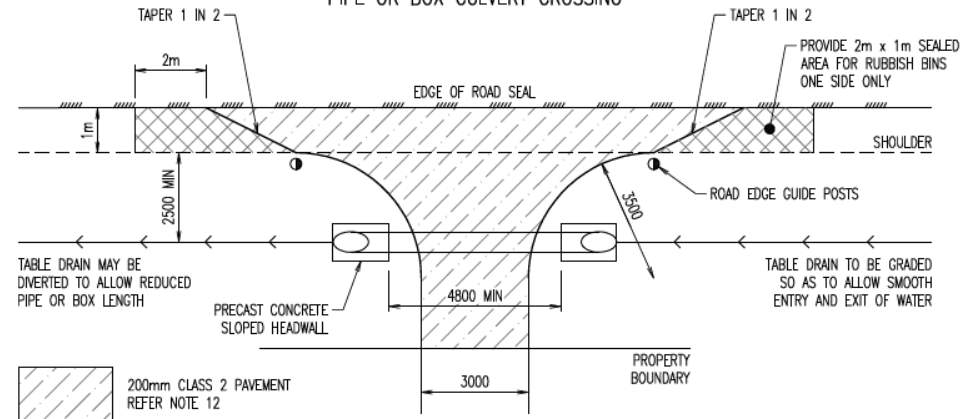

TYPE 'A' CROSS SECTION

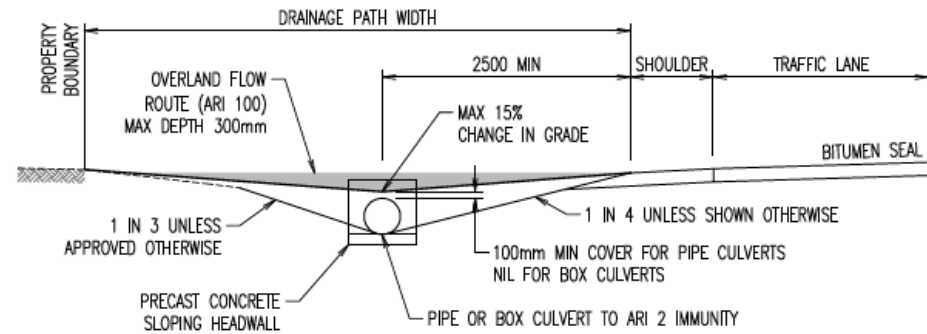

TYPE 'B' CROSS SECTION

F			
E			
D			
C			
B	REGP ADDED, NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE



RURAL ACCESS			
PIPE OR BOX CULVERT AND INVERT CROSSINGS			
DRAWN	CHECKED	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES	DATE
DESIGN OFFICE	CWB *	Darentra Naidu*	08/16
* SIGNED ORIGINAL HELD IN THE DESIGN OFFICE			

STANDARD DRAWING			
SHEET 1 OF 1			
STANDARD DRAWING No:			
A3	FC-230-03		
A	B		

NOTES: RURAL ACCESS PIPE OR BOX CULVERT AND INVERT CROSSING


1. Pipe or box culvert crossings are not to be installed on road that fall to the subject property or where stormwater cannot be directed to a natural water course or drainage easement/system or when there is no upstream stormwater catchment or table drain.
2. Access driveways with grades greater than 10% (1in 10) within property boundaries shall be constructed with non-erodible material (i.e., bitumen, asphalt, concrete, pavers).
3. Table drains and outlets prone to scouring shall be lined with rock, concrete, or stabilised turf for protection.
4. All drainage from within the property and on the driveway, surfaces shall be collected at or inside the property boundary and discharged by way of a sealed pipe or other approved means to Council’s drainage system.
5. The access shall be positioned so as the approach sight distance meets the criteria as stipulated in section 5 of Austroads publication “Intersections at Grade”. Earthworks required within the road reserve to achieve the criteria shall be approved by Council.
6. Calculations for the sizing of pipe or box culverts shall be carried out by a registered professional engineer and approved by Council. Pipe or box culvert design shall provide a minimum ARI 2 immunity.
7. Minimum pipe diameter to be 300mm and minimum box height to be 225mm unless otherwise approved by Council.
8. Where pipe is used for a rural access, pipe to be a minimum class reinforced concrete pipe (fibre or steel reinforced).
9. Minimum pipe or box grade to be 0.5%
10. Low point of access by be a min of 100mm below shoulder hinge point.
11. All Culvert, invert and driveway construction shall be carried out in the section of road reserve contained within the extended property boundary lines.
12. Where an access crossing is required to be provided as a condition of a development permit, a 200mm gravel pavement with a 2-coat bitumen seal shall be provided. Council fee for the installation of a crossing does not include pavement or bitumen surfacing work.
13. Rural access culvert length min 4.8m, max 7.0m between headwalls should a culvert longer than 7.0m be required the owner/developer shall seek written approval from council for the proposal and have the water flow capacity sized in accordance with the development manual.
14. Where access cannot be constructed in accordance with this standard, a sketch of proposal shall be submitted to council for approval.
15. All underground services are to be located on site prior to any excavations works.
16. All appropriate permits must be obtained from Council, including approval of location and levels prior to excavation.
17. The maintenance of all accesses from the through road pavement to the property boundary is the responsibility of the property owner.
18. Maximum allowable grade change to be 15%.
19. Dimensions are in millimetres unless shown otherwise.

F			
E			
D			
C			
B	REGP ADDED, NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE




RURAL ACCESS PIPE OR BOX CULVERT AND INVERT CROSSINGS			
DRAWN	CHECKED	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES	DATE
DESIGN OFFICE	CWB *	Davendra Naidu *	08/16
<small>* SIGNED ORIGINAL HELD IN THE DESIGN OFFICE</small>			


STANDARD DRAWING			
SHEET	1	OF	1
<small>STANDARD DRAWING No:</small>			
A3	FC-230-03		
A	B		

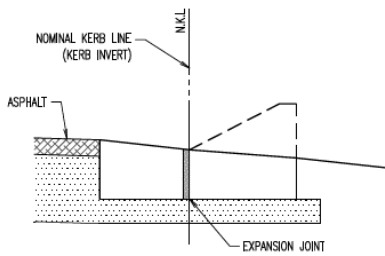


SECTION A-A
FOR TYPE 'B' MOUNTABLE KERB

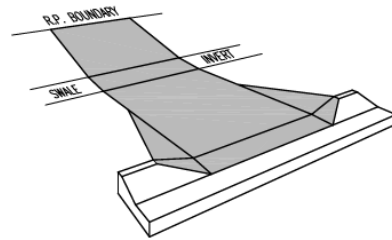


PERSPECTIVE VIEW

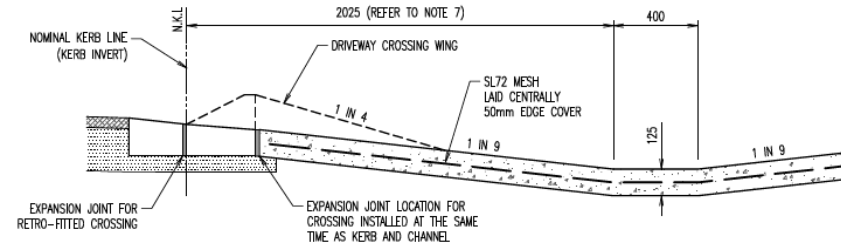


SECTION
(WITH TYPE 'B' MOUNTABLE KERB)

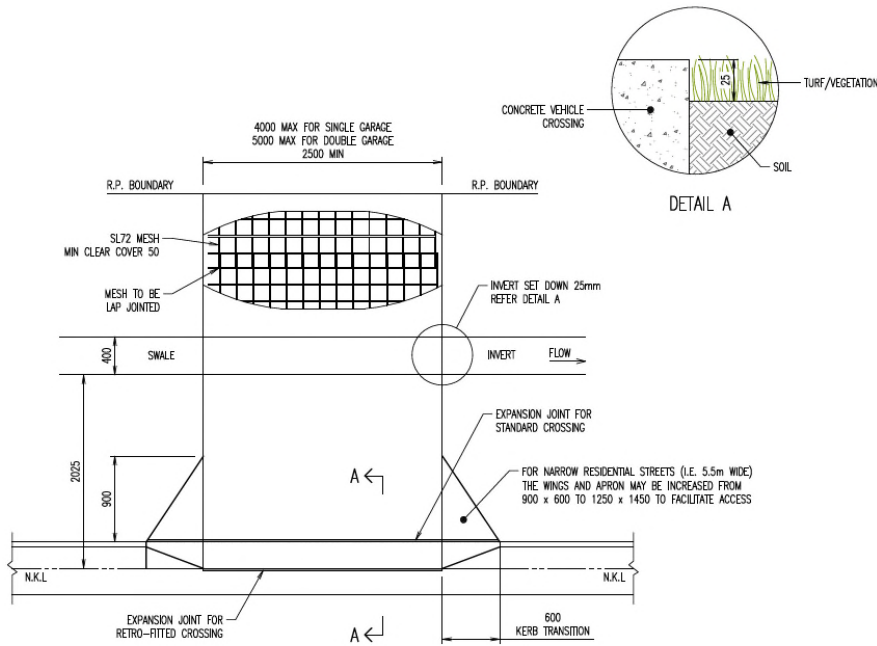

PLAN

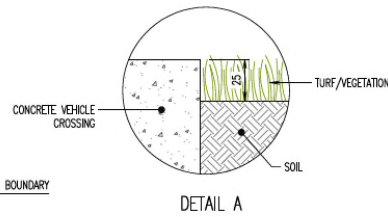

DETAIL A

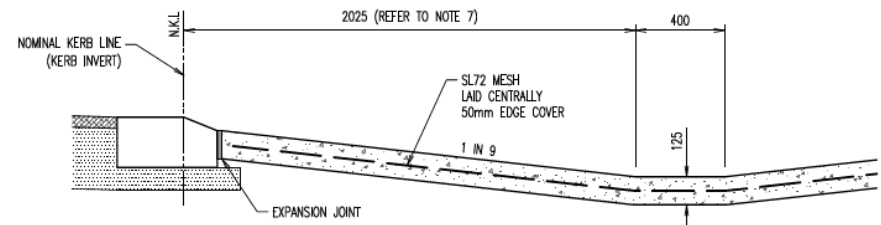

SECTION
(WITH TYPE 'M' MOUNTABLE KERB)

F			
E			
D			
C			
B	NOTES ALTERED & TITLEBLOCK CHANGE		08/16
A	ORIGINAL ISSUE		01/11
REV	DETAILS OF AMENDMENTS	APPROVED	DATE



RESIDENTIAL VEHICLE CROSSING SWALE PROFILE			
DRAWN	CHECKED	APPROVED BY DIRECTOR INFRASTRUCTURE SERVICES	DATE
DESIGN OFFICE	CWB *	Davendra Naidu*	08/16
* SIGNED ORIGINAL HELD IN THE DESIGN OFFICE			

STANDARD DRAWING			
SHEET 1 OF 1		STANDARD DRAWING No:	
A3	FC-230-04		
A	B		

NOTES: RESIDENTIAL VEHICLE CROSSING SWALE PROFILE

1. This crossing is not designed for commercial vehicles.
2. Concrete to be grade N32 in accordance with AS 1379 and AS 3600.
3. Reinforcing mesh to AS/NZS 4671, laid centrally with 50mm edge cover, lap fabric 250mm.
4. Concrete to be broom finished for slip resistance to AS 4586. Finishes other than broom finished concrete to be approved by Council with regards to long term slip resistance and durability.
5. The thickness of decorative surfacing where approved is additional to the concrete thickness specified.
6. Expansion joints to be full depth 10mm thick closed cell cross linked polyethylene foam (85-150 kg/m³) or full depth 10mm thick compressed granulated corkboard. Seal surface joint with a suitable polyurethane sealant.
7. Distance from nominal face of kerb may vary with swale width. Grades re recommended maximums for vehicle access.
8. Dimensions are in millimetres unless shown otherwise.

LEGEND

N.K.L Nominal kerb line (kerb invert)